



ORIGINAL SINCE 1851.

SINGER® PROJECTS

Travel Accessory Roll-Up

By Bethany McCue

Singer Education Specialist



Create a travel accessory roll-up for your accessory feet and sewing notions to take with you as you sew on the go! This cute wrap up is a great way to store your sewing accessories and keep everything you need in one place. This is the perfect project to organize your sewing space.

PROJECT SKILL LEVEL: ☒ ☒ ☐ ☐

Shopping List

Everything you need to complete this project in one place. Use this convenient checklist to ensure you have all required materials in your sewing room, or take it with you while you shop for supplies.

- ☐ ¼" Piecing Foot
- ☐ Rolled Hem Foot
- ☐ Open Toe or Clear Decorative Sewing Foot
- ☐ Zipper Foot
- ☐ Tear-AWay Stabilizer
- ☐ Fusible Fleece
- ☐ 1 Fat Quarter solid cotton fabric for outside
- ☐ 1 Fat Quarter print cotton fabric for lining
- ☐ 6" x 44" wide woven fabric for pockets
- ☐ 12" zipper
- ☐ 1 yard - ½" wide ribbon
- ☐ Construction thread for top and bobbin
- ☐ 2-3 colors of decorative Rayon thread
- ☐ Marking tool (washable pen, chalk, etc)
- ☐ Ruler
- ☐ Straight Pins or Clips
- ☐ Point Turner
- ☐ Fabric scissors
- ☐ Iron

Cut:

Fabric A: Outside

- 10"L x 20" W

Fabric B: Lining

- 10"L x 20" W

Fabric C: Pocket Fabric

- 12" L x 6" W
- (2) 12" L x 4" W
- 8" L x 4" W

Stabilizer

- 10" L x 10" W

Fusible Fleece

- 10" L x 20" W

Prepare:

1. Fuse the Fusible Fleece to the wrong side of the lining fabric.
2. Mark the lining fabric at 3", 5" and 10" from a short edge on the right side of the fabric.
3. Mark the outside fabric at 3", 4" and 5" from a short edge on the right side of the fabric.

Put it All Together:

1. Snap the Zipper Foot onto the left side of the foot on your sewing machine.
2. Select a straight stitch and adjust your needle position so that it does not hit your zipper foot.
3. Place the right side of the zipper to the right side of the 12" x 6" piece of pocket fabric. Align the 12" edge of the fabric with the edge of the zipper.
4. Sew, with the zipper on top, along the edge of the zipper teeth to make an exposed zipper.



5. Fold the fabric back and press to expose the zipper.

6. Center the zipper teeth on the 5" mark of the lining fabric, placing the right side of the zipper down and the fabric to the outside of the lining piece.

- a. When you fold the fabric, it should flip to the center of the lining piece, creating a pocket.




7. Sew with the zipper foot along the other edge of the zipper teeth.


8. Fold the pocket to the center of the lining fabric and pin.
 - a. The pocket fabric should go past the center 10" mark.
9. Attach the rolled hem foot and set your machine to a straight stitch with a center needle position.
10. Roll hem one long edge of both 12"x4" pockets and a short edge of the 8"x4" pocket.
 - a. Remember the bobbin thread is what will be showing on the right side for the rolled hem seam.




11. Attach the general purpose sewing foot to your sewing machine.
12. Place one 12"x4" pocket, right side UP, with the long edge aligned with the 10" side of the lining that does not have the pocket. Pin in place.

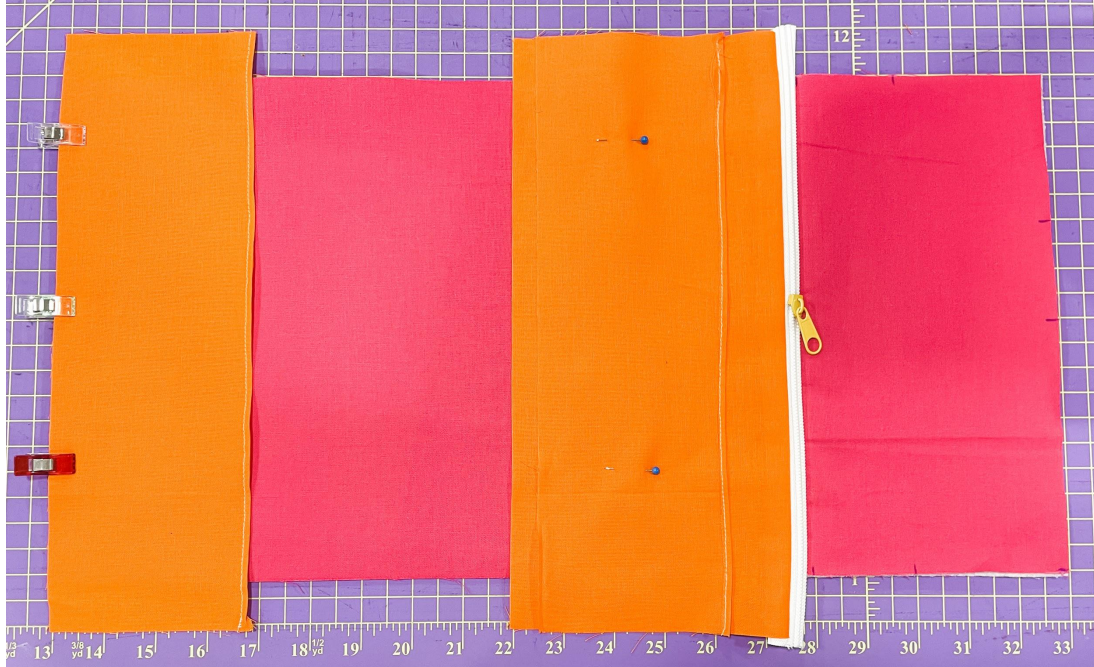

13. Place the other 12"x4", right side DOWN, on top of the pocket with the long edge $\frac{1}{4}$ " from the 10", center line. Pin in place.
 - a. The zipper pocket might be covering the 10" center line.
14. Change the needle position to make a $\frac{1}{4}$ " seam allowance.
15. Sew through all layers (pocket, zippered pocket, lining and fleece) using the right edge of the foot to guide along the raw edge of the rolled pocket.
16. Trim any excess zipper pocket fabric to $\frac{1}{4}$ ".
17. Flip the rolled edge pocket toward the other rolled edge pocket.
18. Place the small 8"x4" pocket right side down, aligning the long edge of the pocket with the 3" line and the short raw edge with one side of the lining.
19. Sew $\frac{1}{4}$ " along the long edge starting at the rolled edge. Back stitch to give support to the pocket.
20. Flip the pocket towards the raw edge of the lining. Pin in place.
21. Starting just above the rolled hem in the center of the pocket. Sew from rolled edge out to the edge of the pocket and lining. Back stitch at the beginning and end.

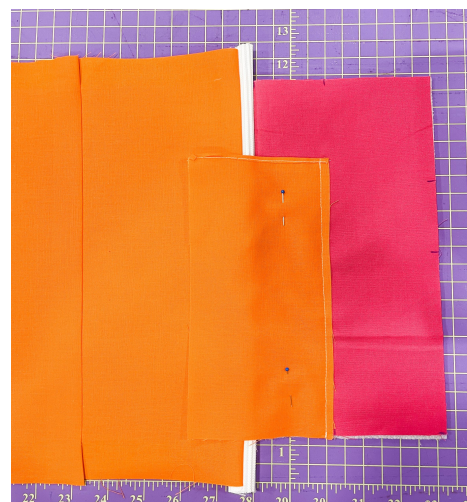


22. Sew two more seams starting at the rolled edge and sewing to the edge to make 4 foot slots.
23. Divide the pocket into thirds. Starting at the rolled edge, sew toward the center of the lining (toward the zippered pocket). Back stitch and stop when you reach the zippered pocket.
24. Sew another line the same way to make 3 foot slots. The pocket lining piece is finished.

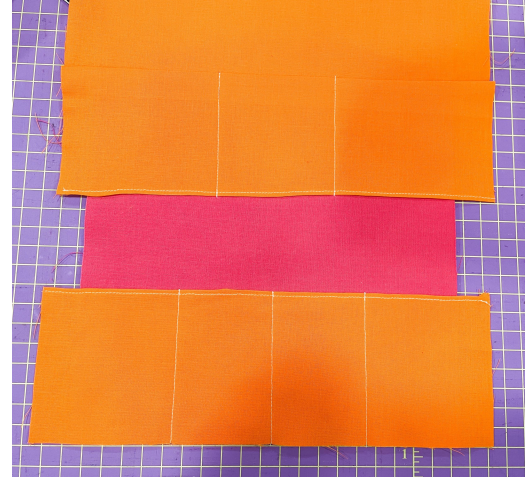

DECORATE:

25. Place the tear-away stabilizer under the marked part of the outside fabric.
26. Thread your sewing machine with decorative rayon thread on the top.
27. Attach the open-toe or clear decorative foot to your sewing machine.
28. Select any decorative stitch on your sewing machine and sew across the 4" line that was marked on the outside fabric.

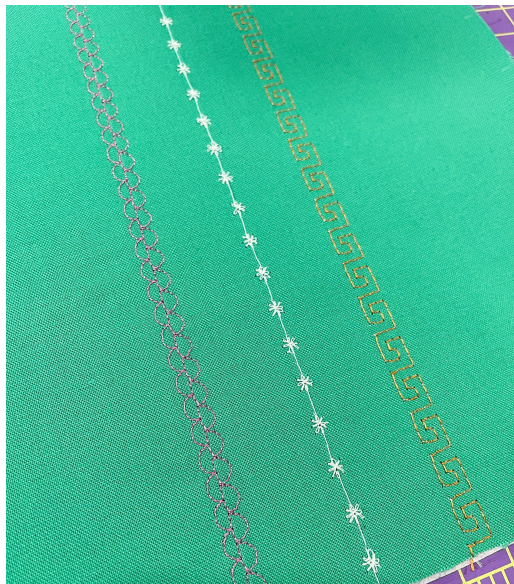

29. Select a different decorative stitch and change to a different color rayon thread.

30. Sew across the 5" line that was marked on the outside fabric.

31. Select a different decorative stitch and thread color to sew across the 7" line that was marked on the outside fabric.

a. Recommend practicing the decorative stitches on scrap fabric to decide which ones you like best before decorating your project.

b. Sew from edge to edge

c. Use the Start/Stop button if desired.


d. Carefully remove the tear away stabilizer from the back of the decorative stitches.

e. The decoration on the outside is finished.

CONSTRUCT:

32. Open the zipper about half way.
33. Fold 20" of ribbon in half and pin the folded end of the ribbon in the center of the edge of the wrap with the long single pocket: (short edge closest to the zipper.)
34. Place the decorated side of the outside fabric right side down with the decoration over the zippered pocket side where the ribbon is pinned.

35. Attach the 1/4" piecing foot to your sewing machine and select a center needle straight stitch.
36. Thread your machine with construction thread in the top and bobbin.
37. Start sewing on the 10" side of the rolled edge pocket side of the wrap (opposite end from the ribbon).
 - a. Leave a 4-5" inch opening to turn the wrap.
38. Sew around the wrap with a 1/4" seam allowance.
39. Trim the corners and any excess fabric.
40. Turn the wrap right side out through the opening.
 - a. Use a corner turner tool to push out the corners and seams.
 - b. Fold in the raw edges of the opening and press with iron.
 - c. Sew a straight stitch along the open edge of the wrap.

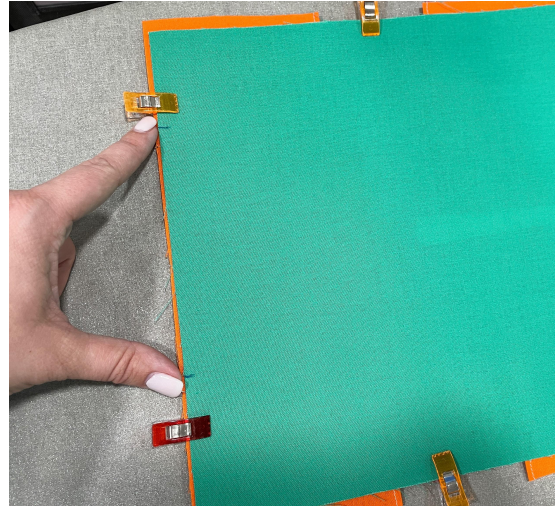

Load up your travel accessory roll-up with all the feet and accessories you need!

